


NOTES

1. BUSINESSES AND APARTMENTS THAT GENERATE A SMALL VOLUME OF REFUSE AND RECYCLABLES (TYPICALLY SMALL OFFICES, DUPLEXES, TRIPLEXES, AND FOURPLEXES) MAY REQUEST TO USE AUTOMATED BARREL SERVICE. PRIOR APPROVAL MUST BE MADE FROM THE SOLID WASTE DIVISION. APPROVAL WILL BE BASED ON THE NEEDS OF THE BUSINESS OR APARTMENT AND CAPABILITY OF ROUTING THE STOP.
2. THE NUMBER OF BARRELS WILL BE DETERMINED BY:
 - BUSINESS – THE NUMBER OF OCCUPANTS AND THE SERVICES THEY PROVIDE.
 - APARTMENTS – THE NUMBER OF UNITS.
3. STORAGE AREA SCREEN WALLS ARE REQUIRED FOR BUSINESSES AND APARTMENTS THAT UTILIZE BARREL SERVICE. THE WALL SHALL BE DESIGNED TO SCREEN THE BINS FROM PUBLIC VIEW.
4. THE LENGTH OF THE PAD WILL DEPEND ON THE NUMBER OF BARRELS RECOMMENDED BY THE SOLID WASTE DIVISION (3' FOR EACH BARREL). THE PAD SHALL BE A MINIMUM OF 3" OF CONCRETE WITHOUT A LIFT. THIS WILL ENABLE THE CUSTOMERS TO ROLL THE BARRELS WITH MINIMUM DIFFICULTY. THE DEPTH SHALL BE 44" AND THE HEIGHT A MINIMUM OF 4'.
5. COLLECTION OF BARRELS WILL FOLLOW THE CURRENT RESIDENTIAL COLLECTION ORDINANCE.

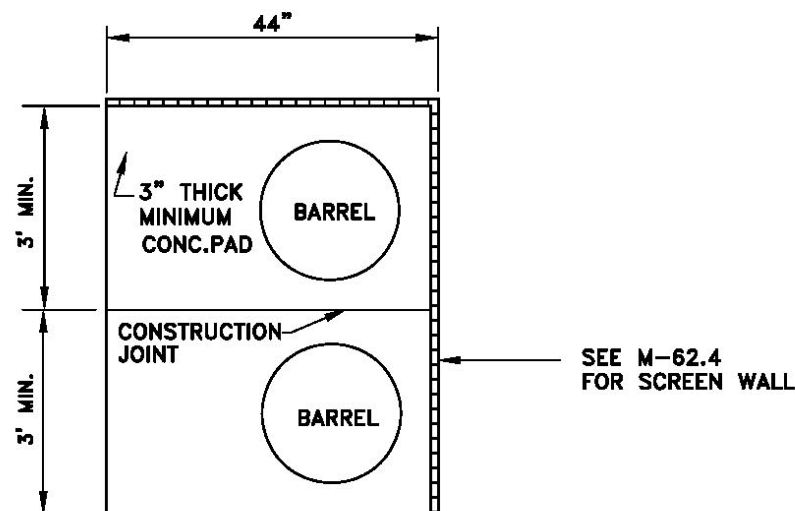

STORAGE AREA SCREEN WALLS FOR BARREL SERVICE
N.T.S.